


AI AGENT-READINESS REPORT

open-wear.com

Ran 36 of 81 checks

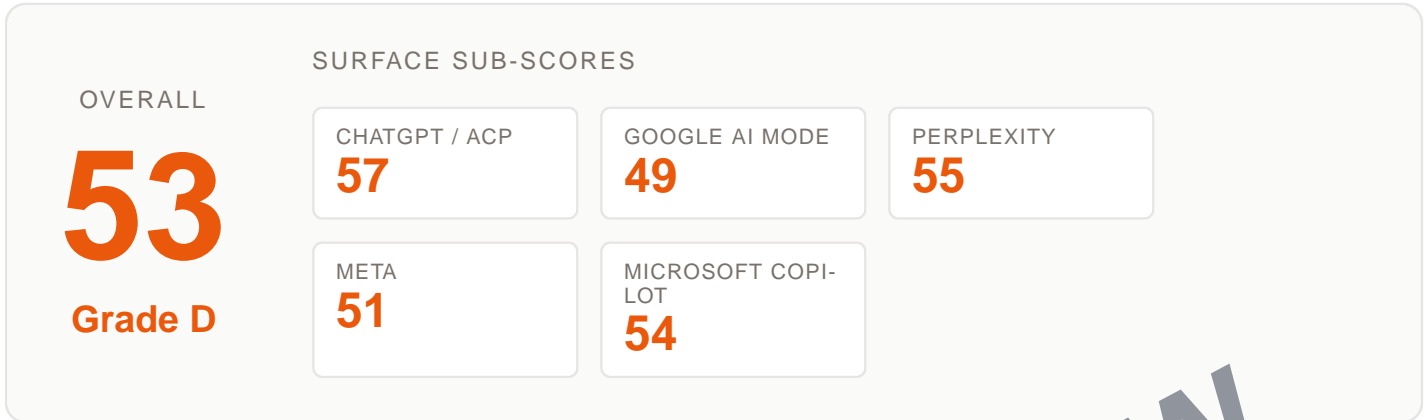

Findings - 16 need attention

NEEDS WORK **CRITICAL** **HTTPS enforced sitewide + HSTS (>= 6-month max-age)**

Enforce HTTPS sitewide and ship a Strict-Transport-Security header with max-age >= 6 months

WHAT WE FOUND

Confirmed the homepage is HTTPS (status 200), probed <http://open-wear.com/> for redirect behaviour, and parsed the Strict-Transport-Security header (absent).

How we checked: URL scheme + homepage status check, an <http://host/> redirect probe, and a Strict-Transport-Security max-age parse (>= 180-day threshold).

- No Strict-Transport-Security header on the homepage response
- <http://> did not redirect to <https://>

Checked: open-wear.com

FAILED **HIGH** **Contact page exposes email or phone**

Add a `mailto:` email link or `tel:` phone link to your contact page

WHAT WE FOUND

Probed 5 candidate contact-page paths and none returned a 2xx response.

How we checked: URL probe of contact paths; the first 2xx body is scanned for `mailto:` / `tel:` hrefs, plain emails (placeholder hosts excluded), and phone-shaped numbers.

- No contact page reachable

Checked: open-wear.com/contact, open-wear.com/contact-us, open-wear.com/pages/contact

FAILED HIGH Privacy policy page reachable

Publish a privacy policy page and link it from your site nav/footer

WHAT WE FOUND

Probed 6 candidate privacy-policy paths (nav-discovered + platform-conventional) and none returned a 2xx body.

How we checked: Discover candidate URLs by scoring homepage nav/footer anchors for privacy/gdpr/cookie keywords, then append platform-conventional paths; probe each with politeFetch and pass on the first 2xx with ≥ 200 stripped-body chars.

- No privacy policy page reachable at any candidate URL

Checked: `open-wear.com/privacy-policy`, `open-wear.com/privacy`, `open-wear.com/policies/privacy-policy`

FAILED HIGH Product pages discoverable without JavaScript

Make product pages discoverable without JavaScript

WHAT WE FOUND

Counted product pages discovered by the non-JavaScript crawl. None were found — JS-only storefront, products missing from sitemap, or the crawl was blocked.

How we checked: Count the product pages a non-JavaScript crawl could discover via the sitemap or initial HTML (no JS execution). The fetcher already attempted discovery; we read `ctx.pdpSample`.

- No product pages discoverable from a non-JavaScript crawl

Checked: `open-wear.com/sitemap.xml`, `open-wear.com`

FAILED HIGH Terms of service page reachable

Publish a terms of service page and link it from your site nav/footer

WHAT WE FOUND

Probed 5 candidate ToS paths (nav-discovered + platform-conventional) and none returned a 2xx body.

How we checked: Discover candidate URLs by scoring homepage nav/footer anchors for terms/tos/legal/conditions keywords, then append platform-conventional paths; probe each with politeFetch and pass on the first 2xx with ≥ 200 stripped-body chars.

- No terms-of-service page reachable at any candidate URL

Checked: `open-wear.com/terms`, `open-wear.com/terms-conditions`, `open-wear.com/terms-of-service`, `open-wear.com/policies/terms-of-service`

FAILED HIGH /.well-known/ucp profile is present with a `version` field

Publish `/.well-known/ucp`` with at minimum a ``version`` field

WHAT WE FOUND

Inspected `/.well-known/ucp`` for a parseable JSON document with a top-level ``version`` string.

How we checked: Confirm `ctx.wellKnownUcp`` is non-null and carries a non-empty ``version`` string (the only universally-required UCP profile field).

- `/.well-known/ucp`` is not reachable or not parseable as JSON

Checked: `open-wear.com/.well-known/ucp``

FAILED HIGH UCP profile carries all four required top-level keys

Add every required top-level key to the UCP profile

WHAT WE FOUND

Wanted to inspect UCP root keys, but no profile was found.

How we checked: Read the profile root (or top-level ``ucp`` wrapper) and verify the presence of ``version``, ``services``, ``capabilities``, and ``signing_keys`` keys.

- No `/.well-known/ucp`` profile present

Checked: `open-wear.com/.well-known/ucp``

FAILED HIGH UCP profile declares a valid shopping service entry

Declare a shopping service entry with a recognised transport and an HTTPS endpoint

WHAT WE FOUND

Wanted to walk the UCP profile's `services[]` for a valid shopping entry, but no profile was found.

How we checked: List every services[] entry whose namespace is `shopping` (or contains `shopping`) and require at least one with `transport` {rest,mcp,a2a,embedded} AND a syntactically valid `https://` endpoint.

- No /.well-known/ucp profile present

Checked: open-wear.com/.well-known/ucp

FAILED HIGH Every signing_keys[] entry is a valid JWK

Make every signing_keys[] entry a JWK with kty + kty-specific params

WHAT WE FOUND

Wanted to validate signing_keys[], but no UCP profile was found.

How we checked: Walk signing_keys[] and validate each entry per §4.1 (kty required) + §6 (kty-specific required parameters). `kid` is OPTIONAL per §4.5 and not enforced here.

- No /.well-known/ucp profile present

Checked: open-wear.com/.well-known/ucp

FAILED MEDIUM Organization/OnlineStore JSON-LD with contactPoint on homepage

Add an Organization (or OnlineStore) JSON-LD block to your homepage with a contactPoint

WHAT WE FOUND

Found a homepage Organization node but its contactPoint is missing both email and telephone.

How we checked: Parse homepage `

FAILED **MEDIUM** Shipping policy page reachable

Publish a shipping policy page and link it from your site nav/footer

WHAT WE FOUND

Probed 6 candidate shipping-policy paths (nav-discovered + platform-conventional) and none returned a 2xx body.

How we checked: Discover candidate URLs by scoring homepage nav/footer anchors for shipping/delivery/dispatch keywords, then append platform-conventional paths; probe each with politeFetch and pass on the first 2xx with ≥ 200 stripped-body chars.

- No shipping policy page reachable at any candidate URL

Checked: open-wear.com/shipping-policy, open-wear.com/shipping, open-wear.com/policies/shipping-policy, open-wear.com/pages/shipping

FAILED **LOW** About page reachable with substantive copy

Publish a substantive About page at a standard URL

WHAT WE FOUND

Probed 5 candidate About-page paths and none returned a 2xx body.

How we checked: URL probe of platform-specific about-page paths via politeFetch; the first 2xx response whose HTML-stripped body length is ≥ 200 chars counts as a pass.

- No About page reachable at any standard URL

Checked: open-wear.com/about, open-wear.com/about-us, open-wear.com/pages/about

FAILED **INFO** Apple Pay markers detected (informational)

Enable Apple Pay through your payment processor (informational only)

WHAT WE FOUND

Scanned the homepage and 0 sampled PDPs for Apple Pay markers; none matched.

How we checked: Substring match on known Apple Pay SDK/markup signatures (ApplePaySession, apple-pay-button, /apple-developer-merchantid-domain-association) across the homepage and every sampled PDP HTML.

- No Apple Pay markers detected on the homepage or PDPs

Checked: open-wear.com

FAILED **INFO** Google Pay markers detected (informational)

Enable Google Pay through your payment processor (informational only)

WHAT WE FOUND

Scanned the homepage and 0 sampled PDPs for Google Pay markers; none matched.

How we checked: Substring match on known Google Pay SDK/markup signatures (pay.google.com/gp/p/js/pay.js, google.payments.api, <google-pay-button) across the homepage and every sampled PDP HTML.

- No Google Pay markers detected on the homepage or PDPs

Checked: open-wear.com

PASSING **CRITICAL** Googlebot allowed on product paths

Allow Googlebot on product paths

WHAT WE FOUND

Checked robots.txt for Googlebot at the representative product path ``/product/test``. The active group resolves to Allow.

How we checked: group match on ``User-agent: Googlebot`` rules at the representative product path ``/product/test`` (via the parsed robots.txt isAllowed predicate).

Checked: open-wear.com/robots.txt, /product/test

NOT APPLICABLE **CRITICAL** Offer price + priceCurrency valid

Set price as a number and priceCurrency as an ISO 4217 code

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for Offer price + priceCurrency.

How we checked: Parse Offer ``price`` (or AggregateOffer ``lowPrice``) as a parseable numeric price ≥ 0 ; require ``priceCurrency`` to match `/^[A-Z]{3}$/i`.

PASSING **CRITICAL** OAI-SearchBot allowed

Allow OAI-SearchBot in robots.txt

WHAT WE FOUND

Checked robots.txt rules for OAI-SearchBot (OpenAI's ChatGPT search/discovery crawler) at path /. The active group resolves to Allow. How we checked: group match on `User-agent: OAI-SearchBot` rules at path `/` (via the parsed robots.txt isAllowed predicate).

Checked: open-wear.com/robots.txt

PASSING **CRITICAL** No global wildcard root disallow

Remove the wildcard `Disallow: /` from robots.txt

WHAT WE FOUND

Scanned the robots.txt wildcard `User-agent: *` group for a root Disallow (wildcard group present; root Disallow absent).

How we checked: Line-by-line scan of robots.txt; track membership of the `User-agent: *` group (stacked UA lines combine into one group per section 2.2.1) and flag the file when a root `Disallow: /` appears in that group with no offsetting `Allow: /`.

Checked: open-wear.com/robots.txt

PASSING **HIGH** Bingbot allowed

Allow Bingbot in robots.txt

WHAT WE FOUND

Checked robots.txt rules for Bingbot (Microsoft's web crawler — also the source for Copilot Shopping's index) at path /. The active group resolves to Allow.

How we checked: group match on `User-agent: Bingbot` rules at path `/` (via the parsed robots.txt isAllowed predicate).

Checked: open-wear.com/robots.txt

NOT APPLICABLE **HIGH** MerchantReturnPolicy finite-window has positive merchantReturnDays

Add a positive `merchantReturnDays` to finite-window return policies

WHAT WE FOUND

No MerchantReturnPolicy node used the MerchantReturnFiniteReturnWindow category, so the `merchantReturnDays` check has nothing to evaluate.

How we checked: For each MerchantReturnPolicy node whose returnPolicyCategory normalizes to MerchantReturnFiniteReturnWindow, require `merchantReturnDays` to be a positive number (or a numeric string > 0).

NOT APPLICABLE **HIGH** MerchantReturnPolicy satisfies Option A (country+category) or B (returnLink)

Make every MerchantReturnPolicy node satisfy Option A or Option B

WHAT WE FOUND

No PDP carried a `hasMerchantReturnPolicy` node, so Option A/B shape cannot be evaluated.

How we checked: For each PDP, walk every `hasMerchantReturnPolicy` node (Product or Offer level) and require either (applicableCountry + returnPolicyCategory) OR a syntactically-valid `merchantReturnLink` URL.

NOT APPLICABLE **HIGH** MerchantReturnPolicy node present on Product or Offer

Emit `hasMerchantReturnPolicy` on Product or Offer JSON-LD

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for `hasMerchantReturnPolicy`.

How we checked: On each PDP, locate the Product JSON-LD node and check for a `hasMerchantReturnPolicy` object/array at Product level OR Offer level. Pass band >= 85% coverage, partial >= 50%.

NOT APPLICABLE **HIGH** Offer `availability` is a Schema.org URL

Use a canonical Schema.org availability IRI on every Offer

WHAT WE FOUND

No PDP carried a resolvable Offer, so there is nothing to inspect for `availability`.

How we checked: On each Offer, accept `availability` only if it matches one of the canonical Schema.org ItemAvailability IRIs (http or https, trailing slash optional).

NOT APPLICABLE **HIGH** Offer JSON-LD carries shippingDetails (OfferShippingDetails)

Emit shippingDetails (OfferShippingDetails) on Offer JSON-LD

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for `shippingDetails`.

How we checked: On each PDP, locate the Product JSON-LD node and check for `shippingDetails` (single object or array) at Product or Offer level. Pass band >= 85% coverage.

NOT APPLICABLE **HIGH** Sampled PDPs are not gated behind a login wall (401 / 403)

Open PDPs to anonymous fetches

WHAT WE FOUND

Wanted to evaluate PDP status codes, but the sample is empty.

How we checked: For each sampled PDP, evaluate the captured HTTP status code (preferred) or fall back to body-presence; 401 / 403 fails.

- No product pages were sampled

NOT APPLICABLE **HIGH** No sampled PDP returns a noindex directive

Remove the noindex directive from every PDP

WHAT WE FOUND

Wanted to inspect sampled PDPs for noindex directives, but the sample is empty.

How we checked: For each sampled PDP, inspect the HTML for `

- No product pages were sampled

NOT APPLICABLE **HIGH** Each PDP carries at most one Product JSON-LD node

Emit a single Product JSON-LD node per PDP

WHAT WE FOUND

Wanted to count Product JSON-LD nodes per sampled PDP, but the sample is empty.

How we checked: For each sampled PDP, count JSON-LD nodes whose @type is `Product` or whose @type array contains `Product`. Each PDP must expose at most one.

- No product pages were sampled

PASSING **HIGH** PerplexityBot allowed

Allow PerplexityBot in robots.txt

WHAT WE FOUND

Checked robots.txt rules for PerplexityBot (Perplexity's shopping index crawler) at path /. The active group resolves to Allow.

How we checked: group match on `User-agent: PerplexityBot` rules at path `/` (via the parsed robots.txt isAllowed predicate).

Checked: open-wear.com/robots.txt

NOT APPLICABLE **HIGH** Brand attribution on PDPs

Surface brand attribution on every PDP

WHAT WE FOUND

No PDPs were sampled, so we have nothing to inspect for brand attribution.

How we checked: On each PDP, accept brand attribution from either (a) `extractBrand` on the first Product JSON-LD node OR (b) an HTML brand signal (OG `product:brand`, `brand` meta, `og:brand`, Microdata `itemprop="brand"`).

NOT APPLICABLE **HIGH** GTIN coverage on PDPs

Populate `gtin` on every branded Product node

WHAT WE FOUND

No PDPs were sampled, so we have nothing to inspect for GTINs.

How we checked: Extract gtin / gtin8 / gtin12 / gtin13 / gtin14 from the first Product JSON-LD node on each PDP; validate digit length.

NOT APPLICABLE **HIGH** Product `image` populated

Add a resolvable image URL to every Product node

WHAT WE FOUND

No PDP in the sample carried a Product JSON-LD node, so there is nothing to inspect for `image`.

How we checked: Resolve `image` on each Product node into a list of URL strings (string, array, or ImageObject.url/contentUrl); require at least one non-empty URL.

NOT APPLICABLE **HIGH** Product JSON-LD present on PDPs

Publish a Product JSON-LD block on every PDP

WHAT WE FOUND

No PDPs were sampled, so we have nothing to inspect for Product JSON-LD.

How we checked: Walk each sampled PDP's parsed `jsonLdBlocks`, flatten `@graph` containers, and count the page as passing if any node has `@type` Product / ProductGroup / IndividualProduct / ProductModel.

NOT APPLICABLE **HIGH** Product `name` populated

Populate `name` on every Product JSON-LD node

WHAT WE FOUND

No PDP in the sample carried a Product JSON-LD node, so there is nothing to inspect for `name`.

How we checked: On each PDP with a Product JSON-LD node, require `name` to be a string of length > 0 after trimming.

NOT APPLICABLE **HIGH** Product JSON-LD includes `offers`

Add an `offers` object to every Product node

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for `offers`.

How we checked: On each Product node, require a resolvable Offer (or first Offer inside an AggregateOffer) via `findOffer`.

PASSING **HIGH** Products are machine-discoverable

Publish a product feed or a crawlable product sitemap

WHAT WE FOUND

Confirmed agents can discover your products via `sitemap_typed` (13 product pages verified).

How we checked: Read the product-discovery cascade result from ctx.discovery. Score by discovery method (feed / platform_api / sitemap_typed -> pass when verifiedProductCount >= MIN_CONFIDENT_PRODUCTS; content_verified -> partial; none or under-threshold -> fail).

Checked: open-wear.com

PASSING **HIGH** robots.txt present at root

Publish a non-empty robots.txt at the site root

WHAT WE FOUND

Reached a non-empty /robots.txt at the site root (175 bytes, 1 declared Sitemap line).

How we checked: Check whether the fetcher reached a non-empty /robots.txt at the site root (§2.2.3 access method).

Checked: open-wear.com/robots.txt

NOT APPLICABLE **HIGH** UCP profile Cache-Control is shared-cacheable with max-age >= 60s

Serve `/.well-known/ucp`` with `Cache-Control: public, max-age=...`

WHAT WE FOUND

No UCP profile present; Cache-Control policy is not evaluable.

How we checked: Parse the `Cache-Control`` header on the `/.well-known/ucp`` response; require `public``, `max-age >= 60``, and no `no-store`/no-cache`/private``.

Checked: `open-wear.com/.well-known/ucp`

NOT APPLICABLE **HIGH** `/.well-known/ucp`` response Content-Type is application/json

Serve `/.well-known/ucp`` with `Content-Type: application/json``

WHAT WE FOUND

No UCP profile present; Content-Type is not evaluable.

How we checked: Check that the `Content-Type`` header on `/.well-known/ucp`` starts with `application/json`` (optionally with a charset parameter).

Checked: `open-wear.com/.well-known/ucp`

NOT APPLICABLE **HIGH** `/.well-known/ucp`` is publicly fetchable with no auth

Allow unauthenticated access to `/.well-known/ucp``

WHAT WE FOUND

No UCP profile reachable; public-fetch evaluation deferred to `ucp-profile-present``.

How we checked: Confirm an unauthenticated GET to `/.well-known/ucp`` returns a 2xx status.

Checked: `open-wear.com/.well-known/ucp`

NOT APPLICABLE **HIGH** `/.well-known/ucp`` returns 200 directly with no redirects

Serve `/.well-known/ucp`` directly with a 200 response

WHAT WE FOUND

No UCP profile present; redirect behaviour is not evaluable.

How we checked: Inspect the final HTTP status of GET `/.well-known/ucp`` and whether any 3xx redirect was followed to reach it.

Checked: `open-wear.com/.well-known/ucp`

NOT APPLICABLE **HIGH** Each service satisfies the transport-conditional field requirements

Populate the conditional fields required by each service's transport

WHAT WE FOUND

No UCP profile present.

How we checked: For each `services[]`` entry with a recognised transport, require the transport-conditional fields: `rest/mcp -> endpoint+schema; a2a -> endpoint; embedded -> schema``.

Checked: `open-wear.com/.well-known/ucp`

NOT APPLICABLE **HIGH** Each service `transport`` is rest, mcp, a2a, or embedded

Set transport to one of rest, mcp, a2a, or embedded

WHAT WE FOUND

No UCP profile present.

How we checked: For each `services[]`` entry, require `transport`` to be one of: rest, mcp, a2a, embedded.

Checked: `open-wear.com/.well-known/ucp`

NOT APPLICABLE **MEDIUM** **HSTS policy carries the includeSubDomains directive**

Add `includeSubDomains` to your Strict-Transport-Security header

WHAT WE FOUND

Looked for `includeSubDomains` in the Strict-Transport-Security header, but HSTS itself is not enabled.

How we checked: Parse the homepage `Strict-Transport-Security` header for the `includeSubDomains` directive (§6.1.2).

- HSTS not enabled; check `https-and-hsts-enforced` first.

Checked: open-wear.com

NOT APPLICABLE **MEDIUM** **MerchantReturnPolicy merchantReturnLink URL is reachable**

Repair every merchantReturnLink URL

WHAT WE FOUND

No MerchantReturnPolicy node carried a `merchantReturnLink` URL, so reachability has nothing to evaluate.

How we checked: Collect every unique `merchantReturnLink` URL across all MerchantReturnPolicy nodes; probe each once via politeFetch (failSoft). 2xx counts as reachable.

NOT APPLICABLE **MEDIUM** **MerchantReturnPolicy applicableCountry uses ISO 3166-1 alpha-2 codes**

Use ISO 3166-1 alpha-2 country codes in applicableCountry

WHAT WE FOUND

No MerchantReturnPolicy node carried `applicableCountry`, so the ISO-code check has nothing to evaluate.

How we checked: On each MerchantReturnPolicy node where `applicableCountry` is set, extract every candidate string and require every one to match `^[A-Z]{2}$/i`.

NOT APPLICABLE **MEDIUM** **MerchantReturnPolicy returnPolicyCategory uses valid Schema.org enum**

Use a valid Schema.org returnPolicyCategory enum value

WHAT WE FOUND

No MerchantReturnPolicy node carried `returnPolicyCategory`, so the enum check has nothing to evaluate.

How we checked: On each MerchantReturnPolicy node where `returnPolicyCategory` is set, accept the bare enum name or the schema.org URL form; reject any other string.

NOT APPLICABLE **MEDIUM** **OfferShippingDetails shippingDestination is a valid DefinedRegion**

Emit shippingDestination as a DefinedRegion with ISO addressCountry

WHAT WE FOUND

No OfferShippingDetails node carried `shippingDestination`, so the DefinedRegion check has nothing to evaluate.

How we checked: On each OfferShippingDetails node where `shippingDestination` is set, require it to be a DefinedRegion (or array) and every entry to carry `addressCountry` matching `^[A-Z]{2}$/i`.

NOT APPLICABLE **MEDIUM** **OfferShippingDetails shippingRate is a valid MonetaryAmount**

Emit shippingRate as a valid MonetaryAmount

WHAT WE FOUND

No OfferShippingDetails node carried `shippingRate`, so the MonetaryAmount check has nothing to evaluate.

How we checked: On each OfferShippingDetails node where `shippingRate` is set, require an object with numeric value/maxValue (typed or numeric string) and a 3-letter ISO 4217 currency.

NOT APPLICABLE **MEDIUM** **Product `brand` is a string or Brand/Organization object**

Emit `brand` as either a string or a typed Brand object on every Product

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for `brand`.

How we checked: On each Product node, accept `brand` if it's a non-empty trimmed string OR an object with a non-empty `name`. Objects with `@type` Brand/Organization but no `name` are rejected.

NOT APPLICABLE **MEDIUM** Product `description` present

Populate `description` on every Product JSON-LD node

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for `description`.

How we checked: Read `description` on each Product node; strip HTML tags and collapse whitespace; require length > 0.

NOT APPLICABLE **MEDIUM** Product `sku` populated

Populate `sku` on every Product JSON-LD node

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for `sku`.

How we checked: On each PDP with a Product node, accept `sku` if it is a non-empty trimmed string or a number.

NOT APPLICABLE **MEDIUM** Product title not a placeholder

Replace placeholder and slug-shape titles with real product names

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for placeholder titles.

How we checked: Read `name` on the first Product JSON-LD node. Fail if empty, matches a known placeholder list (Default Title / Untitled / Product N / sample / test / draft / placeholder), or matches slug shape (lower-case alnum + at least one hyphen).

PASSING **MEDIUM** Sitemap declared in robots.txt

Add a `Sitemap:` line to robots.txt

WHAT WE FOUND

Read robots.txt and counted 1 declared Sitemap line.

How we checked: Read parsed Sitemap: directives from robots.txt (sitemaps.org / implementation note).

Checked: open-wear.com/robots.txt, open-wear.com/sitemap_index.xml

PASSING **MEDIUM** Sitemap <loc> entries are entity-escaped

Entity-escape `&`, `<`, `>` in every <loc>

WHAT WE FOUND

Sampled 26 <loc> entries across 2 sitemap resource(s); every one is properly entity-escaped.

How we checked: Sample the first 100 <loc> entries per sitemap document and check for raw &, <, or > (sitemaps.org entity escaping rules).

Checked: open-wear.com/sitemap_index.xml, open-wear.com/product-sitemap.xml

PASSING **MEDIUM** Sitemap resolvable and includes at least one product URL

Publish a sitemap containing product URLs

WHAT WE FOUND

Resolved an XML sitemap with 13 <loc> entries; 12 look like product URLs (92%).

How we checked: Parse `<loc>` entries from the resolved sitemap (or sitemap index) and classify each against product-URL patterns (`/products/...`, `/product/...`, `/p/<id>`, etc.).

Checked: open-wear.com/sitemap.xml

PASSING **MEDIUM** Sitemap entries share the host of the containing sitemap

Keep every sitemap entry on the sitemap's own host

WHAT WE FOUND

Compared 26 <loc> entries against their sitemap host across 2 resource(s); every entry shares its sitemap's host.

How we checked: For each resolved sitemap resource, parse the sitemap URL's host and compare it against every parsed <loc> URL's host.

Checked: open-wear.com/sitemap_index.xml, open-wear.com/product-sitemap.xml

PASSING **MEDIUM** Sitemap root declares the sitemaps.org 0.9 namespace

Add the sitemaps.org 0.9 xmlns to the root element

WHAT WE FOUND

Inspected 2 sitemap resource(s); every one declares the sitemaps.org 0.9 namespace.

How we checked: Substring-match `xmlns="http://www.sitemaps.org/schemas/sitemap/0.9"` against the raw XML of every resolved sitemap document.

Checked: open-wear.com/sitemap_index.xml, open-wear.com/product-sitemap.xml

NOT APPLICABLE **MEDIUM** Each capability has version + spec + schema

Populate version, spec, and schema on every capabilities[] entry

WHAT WE FOUND

No UCP profile present.

How we checked: For each capabilities[] entry, require non-empty string values for `version`, `spec`, and `schema`.

Checked: open-wear.com/.well-known/ucp

NOT APPLICABLE **MEDIUM** Each service's `spec` URL origin matches its namespace authority

Point each service `spec` URL at the canonical UCP authority

WHAT WE FOUND

No UCP profile present.

How we checked: For each service with a `spec` URL, require the URL origin to be a canonical UCP authority OR the host/path to include the namespace token.

Checked: open-wear.com/.well-known/ucp

NOT APPLICABLE **MEDIUM** Every service `version` matches YYYY-MM-DD

Use ISO-date `version` strings on every service

WHAT WE FOUND

No UCP profile present; service version formats are not evaluable.

How we checked: For each services[] entry, require `version` to be a string matching `/^d{4}-d{2}-d{2}$/`.

Checked: open-wear.com/.well-known/ucp

NOT APPLICABLE **LOW** BreadcrumbList present on PDPs

Add a BreadcrumbList JSON-LD block to every PDP

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is no eligible PDP to inspect for BreadcrumbList.

How we checked: Search every JSON-LD block on each PDP for `@type: BreadcrumbList` with a non-empty itemListElement.

PASSING **LOW** ChatGPT-User allowed

Allow ChatGPT-User in robots.txt (advisory)

WHAT WE FOUND

Checked robots.txt rules for ChatGPT-User (OpenAI's user-initiated live fetcher (advisory)) at path /. The active group resolves to Allow.

How we checked: group match on `User-agent: ChatGPT-User` rules at path `/` (via the parsed robots.txt isAllowed predicate).

Checked: open-wear.com/robots.txt

NOT APPLICABLE **LOW** HSTS policy carries the preload directive

Add `preload` to your Strict-Transport-Security header and submit to hstspreload.org

WHAT WE FOUND

Looked for the `preload` directive in the Strict-Transport-Security header, but HSTS itself is not enabled.

How we checked: Parse the homepage `Strict-Transport-Security` header for the `preload` directive (hstspreload.org vendor extension to).

- HSTS not enabled; check `https-and-hsts-enforced` first.

Checked: open-wear.com

NOT APPLICABLE **LOW** **Alt text on at least 80% of PDP images**

Add descriptive alt text to product images (WCAG 2.x SC 1.1.1)

WHAT WE FOUND

No PDPs were available in the sample — alt-text coverage could not be evaluated.

How we checked: Per PDP, count `` tags via regex; a tag 'has alt text' when its `alt` attribute is present AND non-empty after trim. A PDP passes when it carries no `` at all OR $\geq 80\%$ of its `` tags have non-empty alt.

NOT APPLICABLE **LOW** **Product images meet Google's 50,000-pixel area threshold**

Upload higher-resolution product images (area $\geq 50,000$ pixels)

WHAT WE FOUND

No PDPs were available in the sample — image area could not be evaluated.

How we checked: For every sampled PDP, parse `` tags and read explicit `width` and `height` attributes; a PDP passes when at least one image has `width x height` $\geq 50,000$. PDPs without any explicit-dimension `` are marked indeterminate (this check does not HEAD image URLs).

NOT APPLICABLE **LOW** **MerchantReturnPolicy enrichment enums use valid Schema.org values**

Use Schema.org enum values for `returnFees` / `returnMethod` / `refundType`

WHAT WE FOUND

No `MerchantReturnPolicy` node carried `returnFees`, `returnMethod`, or `refundType`, so the enum check has nothing to evaluate.

How we checked: On each `MerchantReturnPolicy` node, inspect `returnFees` / `returnMethod` / `refundType` if set; require the bare name or schema.org URL form of a value in the corresponding Schema.org enum.

NOT APPLICABLE **LOW** **Offer `itemCondition` is canonical when present**

Either omit `itemCondition` (defaults to `NewCondition`) or set it to a canonical IRI

WHAT WE FOUND

No PDP carried a resolvable Offer, so there is nothing to inspect for `itemCondition`.

How we checked: On each Offer: if `itemCondition` is omitted, count as pass (Google defaults to `NewCondition`). If present, accept only when it matches a canonical Schema.org `ItemCondition` IRI.

NOT APPLICABLE **LOW** **OfferShippingDetails `deliveryTime` is a valid ShippingDeliveryTime**

Emit a `ShippingDeliveryTime` with `handlingTime` and/or `transitTime` populated

WHAT WE FOUND

No `OfferShippingDetails` node carried `deliveryTime`, so the `ShippingDeliveryTime` check has nothing to evaluate.

How we checked: On each `OfferShippingDetails` node where `deliveryTime` is set, require an object with at least one of `handlingTime` / `transitTime` populated as a `QuantitativeValue`.

PASSING **LOW** **Perplexity-User allowed**

Allow `Perplexity-User` in `robots.txt` (advisory)

WHAT WE FOUND

Checked `robots.txt` rules for `Perplexity-User` (`Perplexity's live user-initiated fetcher (advisory)`) at path `/`. The active group resolves to `Allow`.

How we checked: group match on `User-agent: Perplexity-User` rules at path `/` (via the parsed `robots.txt` `isAllowed` predicate).

Checked: `open-wear.com/robots.txt`

NOT APPLICABLE **LOW** **Product `aggregateRating` present**

Add an `AggregateRating` to Product nodes when you have real reviews

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for `aggregateRating`.

How we checked: On each Product node, parse `aggregateRating` (or the first element if it's an array) and require `ratingValue` in `[0,5]` AND `reviewCount` or `ratingCount` ≥ 1 .

NOT APPLICABLE **LOW** Product title quality (present, not all-caps)

Use sentence-case product titles

WHAT WE FOUND

No PDP carried a Product JSON-LD node, so there is nothing to inspect for title quality.

How we checked: Read `name` on the first Product JSON-LD node. Fail if missing/empty after trimming OR if the string contains letters and they're all upper-case.

PASSING **LOW** /robots.txt is served as text/plain

Send Content-Type: text/plain on /robots.txt

WHAT WE FOUND

Inspected /robots.txt Content-Type ("text/plain; charset=utf-8"); recognised as text/plain.

How we checked: Inspect the /robots.txt response `Content-Type` header for a `text/plain` media type per §2.3.

Checked: open-wear.com/robots.txt

PASSING **LOW** /robots.txt is under 500 KiB (RFC 9309 §2.5 parser cap)

Trim /robots.txt below 500 KiB

WHAT WE FOUND

Measured /robots.txt at 175 bytes; within the 512,000-byte (500 KiB) cap.

How we checked: Measure the raw byte size of the /robots.txt body and compare against the §2.5 parser cap (≥ 500 KiB).

Checked: open-wear.com/robots.txt

PASSING **LOW** /robots.txt is served as UTF-8

Serve /robots.txt as UTF-8

WHAT WE FOUND

Inspected the /robots.txt byte stream (175 bytes); decodes as UTF-8.

How we checked: Inspect the raw byte stream of /robots.txt for UTF-8 decodability per §2.3.

Checked: open-wear.com/robots.txt

PASSING **LOW** Every sitemap <loc> URL is under 2048 characters

Keep every <loc> URL under 2,048 characters

WHAT WE FOUND

Inspected 26 <loc> entries across 2 sitemap resource(s); every one is under 2,048 characters.

How we checked: Iterate every parsed <loc> URL across all resolved sitemap resources and check length against the 2,048-character cap.

Checked: open-wear.com/sitemap_index.xml, open-wear.com/product-sitemap.xml

PASSING **LOW** Sitemap respects 50 MiB / 50,000-URL caps per document

Split over-cap sitemaps into a sitemap index

WHAT WE FOUND

Checked 2 sitemap resource(s) against the 50 MiB / 50,000-URL caps; every one is within the limits.

How we checked: Check raw byte size ($\leq 52,428,800$ B) and entry count ($\leq 50,000$) for every resolved sitemap resource.

Checked: open-wear.com/sitemap_index.xml, open-wear.com/product-sitemap.xml

PASSING **LOW** Sitemap is served as UTF-8

Serve every sitemap document as UTF-8

WHAT WE FOUND

Inspected 2 sitemap resource(s); every one decodes as UTF-8.

How we checked: Inspect every resolved sitemap document's raw byte stream for UTF-8 decodability (sitemaps.org encoding requirement).

Checked: open-wear.com/sitemap_index.xml, open-wear.com/product-sitemap.xml

NOT APPLICABLE **LOW** **UCP MCP-transport entries have valid HTTPS endpoints**

Make every declared MCP transport endpoint an absolute HTTPS URL

WHAT WE FOUND

No UCP profile found; MCP transport validity is not evaluable.

How we checked: Filter services[] to entries where transport=mcp and validate that `endpoint` is an absolute https:// URL.

Checked: `open-wear.com/.well-known/ucp`

NOT APPLICABLE **INFO** **llms.txt present (informational)**

Publish an `/llms.txt` manifest (optional)

WHAT WE FOUND

Looked for `/llms.txt` at the site root; the fetcher returned no file.

How we checked: Check whether the fetcher reached an `/llms.txt` at the site root. Informational only — no failure path per llmstxt.org being a voluntary community convention.

Checked: `open-wear.com/llms.txt`



FREE PREVIEW